

# Water Systems



**Series 100**  
Premium, Hardwall Water  
(Single Wire)



**Series 104**  
Premium Rubber Sanitation Hose  
(Single Wire)



**Series 110**  
Premium Softwall Water  
(Non-Wire)



**Series 152**  
Corrugated Water  
(Double Wire)



**Series 120**  
Standard Bilge Hose



**Series 132**  
Heavy-Duty Water Heater Hose



**Series 140**  
Corrugated PVC Water Hose



**Series 140W**  
Wire Reinforced PVC Water Hose



**Series 141**  
PVC Bilge Vac Hose



**Series 144**  
MPI Odor-Guard  
Premium PVC Sanitation Hose



**Series 145**  
Heavy-Duty PVC Livewell Hose - Clear



**Series 147 & 147W**  
Corrugated Hose End Cuff



**Series 148**  
Premium PVC Sanitation & Water Hose




**Series 149**  
Heavy-Duty PVC Livewell Hose



**Series 150**  
Clear PVC Tubing



**Series 163**  
MPI Air-Con

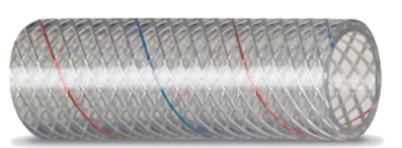

**Series 162**  
Clear Reinforced PVC Tubing  
(Red & Blue Tracer)



**Series 164**  
Clear Reinforced Tubing (Blue Tracer)



**Series 165**  
Heavy - Duty Clear Reinforced Tubing

## WATER SYSTEMS

### Series 100 Premium Hardwall Water (Single Wire)



Premium quality water hose suitable for engine raw water intake and circulation, bilge, drain. Tough, fully-embedded helical wire construction provides excellent strength and flexibility. Resists heat, ozone, mild acids, bilge oils and engine water. Meets or exceeds the requirements of SAE J2006 R2 standard, and has double the ozone resistance required by the SAE standard. Is formulated for maximum resistance to fuels, weather, UV and ozone resistant. Temperature range is -20°F to 220°F (-29°C to 104°C)

\* 100-1560\* Special order- minimum quantities required

#### Specifications

SKU	I.D.	IN	MM	O.D.	MM	Weightlbs/ft (kg/m)
100-0120	1/2"	.500	12.7	.818"	20.8	0.22 (0.32)
100-0580	5/8"	.625	16.1	.950"	24.1	0.26 (0.39)
100-0340	3/4"	.750	19.1	1.069"	27.1	0.30 (0.45)
100-0780	7/8"	.875	22.2	1.250"	31.8	0.34 (0.51)
100-1000	1"	1.000	25.4	1.319"	33.5	0.38 (0.57)
100-1180	1-1/8"	1.125	28.6	1.444"	36.7	0.43 (0.63)
100-1140	1-1/4"	1.250	31.8	1.569"	39.8	0.47 (0.70)
100-1560*	1-5/16"	1.312	33.3	1.656"	42.1	0.49 (0.73)
100-1380	1-3/8"	1.378	35.0	1.697"	43.1	0.50 (0.76)
100-1120	1-1/2"	1.500	38.1	1.819"	46.2	0.55 (0.82)
100-1340	1-3/4"	1.775	45.1	2.093"	53.2	0.64 (0.95)
100-1780	1-7/8"	1.875	47.6	2.313"	58.8	TBD

SKU	I.D.	IN	MM	O.D.	MM	Weightlbs/ft (kg/m)
100-2000	2"	2.000	50.8	2.375"	60.3	TBD

### Series 100

SKU	I.D.	Length	Color
100-0120	1/2"	50'	Black
100-0580	5/8"	50'	Black
100-0340	3/4"	50'	Black
100-0780	7/8"	50'	Black
100-1000	1"	50'	Black
100-1180	1-1/8"	50'	Black
100-1140	1-1/4"	50'	Black
100-1560*	1-5/16"	50'	Black
100-1380	1-3/8"	50'	Black
100-1120	1-1/2"	50'	Black
100-1340	1-3/4"	50'	Black
100-1780	1-7/8"	50'	Black
100-2000	2"	50'	Black

## Series 104 Premium Rubber Sanitation Hose (Single Wire)



Premium heavy-duty sanitation hose suitable for all head and holding tank connections. Specially compounded rubber provides maximum resistance to odor permeation and toilet chemicals. Helical wire construction provides excellent strength and flexibility. Resists heat and ozone. Meets or exceeds the requirements of SAE J2006 R2 standard and has double the ozone resistance required by the SAE standard. Is formulated for maximum resistance to weather, UV and ozone resistant. Temperature range is -20°F to 220°F (-29°C to 104°C).

### Specifications

SKU	I.D.	IN	MM	O.D.	MM	Weightlbs/ft (kg/m)
104-1000	1"	1.000	25.4	1.313"	33.5	0.38 (0.57)
104-1140	1-1/4"	1.250	31.8	1.563"	39.8	0.47 (0.70)
104-1120	1-1/2"	1.500	38.1	1.820"	46.2	0.55 (0.82)
104-1780	1-7/8"	1.875	47.6	2.313"	58.8	TBD

### Series 104

SKU	I.D.	Length	Color
104-1000	1"	50'	Black
104-1140	1-1/4"	50'	Black
104-1120	1-1/2"	50'	Black
104-1780	1-7/8"	50'	Black

## Series 110 Premium Softwall Water (Non-Wire)



Premium quality water hose suitable for engine raw water intake and circulation, bilge, drain. Tough, two-ply fabric reinforced construction provides excellent strength and is not flexibility. Resists heat, ozone, mild acids, bilge oils and engine water. Meets or exceeds the requirements of SAE J2006 R1 standard, and has double the ozone resistance required by the SAE standard. Is formulated for maximum resistance to fuels, weather, UV and ozone resistant. Temperature range is -20°F to 220°F (-29°C to 104°C).

\* 110-1560\* Special order- minimum quantities required

### Specifications

SKU	I.D.	IN	MM	O.D.	Weightlbs/ft (kg/m)
110-0120	1/2"	.500	12.7	.875"	0.27 (0.40)
110-0580	5/8"	.625	16.1	1.018"	0.29 (0.43)
110-0340	3/4"	.750	19.1	1.129"	0.31 (0.46)
110-0780	7/8"	.875	22.2	1.261"	0.37 (0.55)
110-1000	1"	1.000	25.4	1.370"	0.39 (0.59)
110-1180	1-1/8"	1.125	28.6	1.495"	0.43 (0.64)
110-1140	1-1/4"	1.250	31.8	1.683"	0.57 (0.85)
110-1560*	1-5/16"	1.312	33.3	1.688"	0.58 (0.86)
110-1380	1-3/8"	1.375	35.0	1.750"	0.59 (0.88)

### Series 110

SKU	I.D.	Length	Color
110-0120	1/2"	50'	Black
110-0580	5/8"	50'	Black
110-0340	3/4"	50'	Black

SKU	I.D.	Length	Color
110-0780	7/8"	50'	Black
110-1000	1"	50'	Black
110-1180	1-1/8"	50'	Black
110-1140	1-1/4"	50'	Black
110-1560*	1-5/16"	50'	Black
110-1380	1-3/8"	50'	Black

## Series 152 Corrugated Water (Double Wire)



Premium quality water hose suitable for engine raw water intake and circulation, bilge, drain. Tough, fully-embedded helical wire construction provides excellent strength and flexibility. Resists heat, ozone, mild acids, bilge oils and engine water. Meets or exceeds the requirements of SAE J2006 R2 standard, and has double the ozone resistance required by the SAE standard. Is formulated for maximum resistance to fuels, weather, UV and ozone resistant. Temperature range is -20°F to 220°F (-29°C to 104°C).

### Specifications

SKU	I.D.	IN	MM	O.D.	MM	Weight/lbs/ft (kg/m)
152-2000	2"	2.000	50.8	2.320"	58.9	0.73 (1.09)
152-2120	2-1/2"	2.500	63.5	2.825"	71.7	0.73 (1.09)
152-3000	3"	3.000	76.2	3.359"	85.3	1.21 (1.80)

### Series 152

SKU	I.D.	Length	Color
152-2000	2"	50'	Black

SKU	I.D.	Length	Color
152-2120	2-1/2"	50'	Black
152-3000	3"	50'	Black

## Series 120 Standard Bilge Hose



Ideal for electric and manual bilge pumps and livewell aerators. Heavy-corrugated polyethylene construction with custom molded cuff every foot for easy installation and clamping. Excellent flexibility. Resists heat, cold, sea water, ozone and oily bilge acids.

Premium quality heavy-duty polyethylene construction bilge hose with custom molded cuff every foot for easy installation and clamping. Excellent flexibility. Resists heat, cold, sea water, ozone and oily bilge acids. Temperature range is -40°F to 160°F (-40°C to 71°C).

DO NOT USE ON THROUGH HULL FITTING BELOW WATER LINE.

### Specifications

SKU	I.D.	IN	MM	O.D.	MM	Weightlbs/ft (kg/m)
120-0580	5/8"	.625	15.8	.718"	18.2	0.05 (0.07)
120-0340	3/4"	.750	18.6	.855"	21.7	0.06 (0.09)
120-1180	1-1/8"	1.125	29.2	1.215"	30.9	0.07 (0.10)
120-1140	1-1/4"	1.250	31.2	1.335"	33.9	0.10 (0.15)
120-1120	1-1/2"	1.500	40.8	1.547"	40.0	0.13 (0.19)

### Series 120

SKU	I.D.	Bulk Length (ft)	Bulk Length (m)	Color
120-0580	5/8"	600'	182.9	Black
120-0340	3/4"	500'	152.4	Black
120-1180	1-1/8"	250'	76.2	Black

SKU	I.D.	Bulk Length (ft)	Bulk Length (m)	Color
120-1140	1-1/4"	250'	76.2	Black
120-1120	1-1/2"	150'	45.7	Black

## Series 132 Heavy-Duty Water Heater Hose



Used mainly for engine water, water heater, air conditioning circulation, icebox, sink and shower drain lines. Heavy EPDM tube and cover reinforced with high-strength polyester yarn. Resistant to mild chemicals, heat, cold, ozone and sea water. Temperature range is -40°F to 210°F (-40°C to 99°C).

### Specifications

SKU	I.D.	IN	MM	O.D.	MM	Weightlbs/ft (kg/m)
132-0380	3/8"	.375	9.5	.670"	36.8	0.58 (0.86)
132-0120	1/2"	.500	13.0	.813"	28.5	0.38 (0.57)
132-0580	5/8"	.625	15.9	.970"	24.6	0.30 (0.45)
132-0580R	5/8"	.625	15.9	.970"	24.6	0.30 (0.45)
132-0340	3/4"	.750	19.1	1.120"	20.7	0.20 (0.30)
132-1000	1"	1.000	25.4	1.450"	17.0	0.16 (0.24)

### Series 132

SKU	I.D.	Length	Color
132-0380	3/8"	500'	Black
132-0120	1/2"	500'	Black
132-0580	5/8"	450'	Red
132-0580R	5/8"	450'	Black

SKU	I.D.	Length	Color
132-0340	3/4"	325'	Black
132-1000	1"	175'	Black

## Series 140 Corrugated PVC Water Hose



Flexible vinyl hose with smooth inside surface for sink and shower drains, potable water fill, and heavy-duty bilge discharge. Excellent bend radius. Temperature range is -40°F to 160°F (-40°C to 71°C).

Use Series 147 (right-handed thread) Hose End Cuff.

DO NOT USE ON THROUGH HULL FITTING BELOW WATER LINE.

### Specifications

SKU	I.D.	IN	MM	O.D.	MM	Weightlbs/ft (kg/m)
140-0340	3/4"	.750	19.3	.980"	31.6	0.16 (0.24)
140-1140	1-1/4"	1.250	31.8	1.500"	24.9	0.12 (0.18)
140-1000	1"	1.000	25.7	1.245"	34.9	0.19 (0.28)
140-1180	1-1/8"	1.125	28.6	1.375"	38.1	0.21 (0.31)
140-1120	1-1/2"	1.500	38.5	1.810"	46.0	0.28 (0.42)

### Series 140

SKU	I.D.	Length	Color
140-0340	3/4"	100'	White
140-1140	1-1/4"	100'	White
140-1000	1"	100'	White
140-1180	1-1/8"	100'	White
140-1120	1-1/2"	100'	White

## Series 140W Wire Reinforced PVC Water Hose



Extremely flexible vinyl hose supported by vinyl coated helical steel wire. Nylon reinforcement added to 1-1/2" I.D. hose for added strength. For use as heavy-duty bilge discharge and various drain lines. Temperature range is -40°F to 160°F (-40°C to 71°C).

Use series 147W (left-handed thread) Hose End Cuff.  
DO NOT USE ON THROUGH HULL FITTING BELOW WATER LINE.

### Specifications

SKU	I.D.	IN	MM	O.D.	MM	Weightlbs/ft (kg/m)
140-1140W	1-1/4"	1.250	31.8	1.500"	38.1	0.21 (0.31)
140-1120W	1-1/2"	1.500	38.5	1.810"	46.0	0.28 (0.42)

### Series 140W

SKU	I.D.	Length	Color
140-1140W	1-1/4"	200'	White
140-1120W	1-1/2"	100'	White

## Series 141 PVC Bilge Vac Hose



For use in bilge pump discharge, livewell circulation, and scupper drains. Corrugated, clear PVC tube reinforced with black PVC helical rod. Excellent flexibility. Not recommended for use in Alcohol, anti-freeze, petrochemical, mild acid, solvent or pressurized water systems. Temperature range is -40°F to 160°F (-40°C to 71°C).

### Specifications

SKU	I.D.	IN	MM	O.D.	MM	Weight lbs/ft (kg/m)
141-0580	5/8"	.625	16.1	.840"	21.3	0.10 (0.15)
141-0340	3/4"	.750	19.3	.980"	24.9	0.12 (0.18)
141-1000	1"	1.000	25.7	1.245"	31.6	0.16 (0.24)
141-1180	1-1/8"	1.125	28.6	1.375"	34.9	0.19 (0.28)
141-1120	1-1/2"	1.500	38.5	1.810"	46.0	0.28 (0.42)
141-2000	2"	2.000	51.1	2.365"	60.1	0.30 (0.45)

### Series 141

SKU	I.D.	Length	Color
141-0580	5/8"	100'	Black
141-0340	3/4"	100'	Black
141-1000	1"	100'	Black
141-1180	1-1/8"	100'	Black
141-1120	1-1/2"	100'	Black
141-2000	2"	50'	Black

## Series 144

### MPI Odor-Guard

### Premium PVC Sanitation Hose



Smooth wall extra heavy-duty vinyl hose with PVC helical reinforcement. Has the same flexibility as our Premium Sanitation Hose. Extra odor fighting compound for all head and holding tank connections. Not recommended for use in alcohol, anti-freeze, petrochemical, potable water, solvent or pressurized water systems. Temperature range is -40°F to 160°F (-40°C to 71°C).

#### Specifications

SKU	I.D.	IN	MM	O.D.	MM	Weightlbs/ft (kg/m)
144-1000	1"	1.000	25.7	1.245"	31.6	0.16 (0.24)
144-1120	1-1/2"	1.500	38.5	1.810"	46.0	0.28 (0.42)

#### Series 144

SKU	I.D.	Length	Color
144-1000	1"	100'	White
144-1120	1-1/2"	100'	White

## Series 145 Heavy-Duty PVC Livewell Hose – Clear



For use in heavy-duty bilge pump discharge and livewell circulation. Smooth clear PVC tube reinforced with black PVC helical rod for excellent flexibility. Clear smooth outer surface permits easy clamping and visual inspection of blockage. Not recommended for use in alcohol, anti-freeze, petrochemical, mild acid, solvent or pressurized water systems. Temperature range is -40°F to 160°F (-40°C to 71°C).

### Specifications

SKU	I.D.	IN	MM	O.D.	MM	Weight/lbs/ft (kg/m)
145-0580	5/8"	.625	16.1	.840"	38.1	0.19 (0.28)
145-0340	3/4"	.750	19.3	.980"	34.9	0.16 (0.24)
145-1000	1"	1.000	25.7	1.245"	31.6	0.12 (0.18)
145-0120	1/2"	.500	12.7	.625"	46.0	0.21 (0.31)
145-1180	1-1/8"	1.125	28.6	1.375"	24.9	0.10 (0.15)
145-1140	1-1/4"	1.250	31.8	1.500"	21.3	0.10 (0.15)
145-1120	1-1/2"	1.500	38.5	1.810"	15.9	0.28 (0.42)

### Series 145

SKU	I.D.	Length	Color
145-0580	5/8"	100'	Clear
145-0340	3/4"	100'	Clear
145-1000	1"	100'	Clear
145-0120	1/2"	100'	Clear
145-1180	1-1/8"	100'	Clear
145-1140	1-1/4"	100'	Clear
145-1120	1-1/2"	100'	Clear

## Series 147 & 147W Corrugated Hose End Cuff



Series 147 (right-handed thread) for Series 140 corrugated PVC water hose.  
Series 147W (left-handed thread) for Series 140W corrugated PVC water hose.  
Made of durable PVC using FDA materials. Provides excellent clamping surface for Series 140 and 140W corrugated PVC water hose. Apply with a sealing compound for water tight fit.

### Specifications

SKU	I.D.	IN	MM	O.D.	MM	Weight/lbs/ft (kg/m)
147-0340	3/4"	.760	19.3	.980"	46.0	0.07 (0.10)
147-1000	1"	1.010	25.7	1.245"	38.1	0.09 (0.13)
147-1180	1-1/8"	1.125	28.6	1.315"	46.0	0.11 (0.17)
147-1140	1-1/4"	1.125	31.8	1.375"	38.1	0.12 (0.18)
147-1120	1-1/2"	1.515	38.5	1.500"	33.4	0.13 (0.19)
147-1140W	1-1/4"	1.250	31.8	1.375"	31.6	0.12 (0.18)
147-1120W	1-1/2"	1.515	38.5	1.500"	24.9	0.13 (0.19)

### Series 147 & 147W

SKU	I.D.	Unit (ea)	Color
147-0340	3/4"	1	White
147-1000	1"	1	White
147-1180	1-1/8"	1	White
147-1140	1-1/4"	1	White
147-1120	1-1/2"	1	White
147-1140W	1-1/4"	1	White
147-1120W	1-1/2"	1	White

## Series 148

### Premium PVC Sanitation & Water Hose



FDA approved compounds. For use in holding tank connection, sanitation vent and toilet systems. Smooth extra heavy-duty PVC tube, reinforced with PVC helical rod. Made with specially formulated FDA approved material to provide excellent resistance to odor permeation and toilet chemicals. Not recommended for use in Alcohol, anti-freeze, petrochemical, potable water, solvent or pressurized water systems. Temperature range is -40°F to 160°F (-40°C to 71°C).

#### Specifications

SKU	I.D.	IN	MM	MM	O.D.	Weightlbs/ft (kg/m)
148-0580	5/8"	.625	16.1	21.3	.840"	0.10 (0.15)
148-0340	3/4"	.750	19.3	24.9	.980"	0.12 (0.18 )
148-1000	1"	1.000	25.7	31.6	1.245"	0.16 (.24)
148-1180	1-1/8"	1.125	28.6	34.9	1.375"	0.19 (0.28)
148-1140	1-1/4"	1.250	31.8	38.1	1.500"	0.21 (0.31)
148-1120	1-1/2"	1.500	38.5	46.0	1.810"	0.28 (0.42)
148-2000	2"	2.000	51.1	60.1	2.365"	0.30 (0.45)

#### Series 148

SKU	I.D.	Length	Color
148-0580	5/8"	100'	White
148-0340	3/4"	100'	White
148-1000	1"	100'	White
148-1180	1-1/8"	100'	White
148-1140	1-1/4"	100'	White
148-1120	1-1/2"	100'	White

SKU	I.D.	Length	Color
148-2000	2"	50'	White

## Series 149 Heavy-Duty PVC Livewell Hose



For use in heavy-duty bilge pump discharge and livewell circulation. Smooth black PVC tube reinforced with white PVC helical rod. Excellent flexibility, Smooth outer surface permits easy clamping. Not recommended for use in Alcohol, anti-freeze, petrochemical, mild acid, solvent or pressurized water systems. Temperature range is -40°F 160°F (-40°C to 71°C).

### Specifications

SKU	I.D.	IN	MM	O.D.	MM	Weightlbs/ft (kg/m)
149-0580	5/8"	.625	16.1	.840"	21.3	0.10 (0.15)
149-0340	3/4"	.750	19.3	.980"	24.9	0.12 (0.18)
149-1000	1"	1.000	25.7	1.245"	31.6	0.16 (0.24)
149-1180	1-1/8"	1.125	28.6	1.375"	34.9	0.19 (0.28)
149-1120	1-1/2"	1.500	38.5	1.810"	46.0	0.28 (0.42)
149-2000	2"	2.000	51.1	2.365"	60.1	0.30 (0.45)

### Series 149

SKU	I.D.	Length	Color
149-0580	5/8"	100'	Black
149-0340	3/4"	100'	Black
149-1000	1"	100'	Black
149-1180	1-1/8"	100'	Black
149-1120	1-1/2"	100'	Black
149-2000	2"	50'	Black

## Series 150 Clear PVC Tubing



Excellent for use in cool water applications such as fresh water, sink, shower, livewell  
NON-TOXIC vinyl produced FDA approved compound. Temperature range is -40°F  
to 150°F (-40°C to 66°C).

### Specifications

SKU	I.D.	IN	MM	O.D.	MM	Weightlbs/ft (kg/m)
150-0180	1/8"	.125	3.2	.25"	6.4	TBD
150-0360	3/16"	.188	4.8	.375"	9.5	TBD
150-0140	1/4"	.250	6.4	.406"	10.3	TBD
150-0560	5/16"	.313	7.9	.439"	11.2	0.09 (0.13)
150-0380	3/8"	.375	9.5	.563"	18.3	0.14 (0.21)
150-0120	1/2"	.500	12.7	.720"	14.3	0.16 (0.24)
150-0580	5/8"	.625	15.9	.845"	21.5	0.21 (0.31)
150-0340	3/4"	.750	19.1	.970"	24.6	0.31 (0.46)
150-1000	1"	1.000	25.4	1.250"	31.8	0.32 (0.48)
150-1140	1-1/4"	1.250	31.8	1.562"	39.7	0.51 (0.76)
150-1120	1-1/2"	1.500	38.1	1.875"	47.6	0.65 (0.97)

### Series 150

SKU	I.D.	Length	Color
150-0180	1/8"	100'	Clear
150-0360	3/16"	200'	Clear
150-0140	1/4"	200'	Clear
150-0560	5/16"	200'	Clear
150-0380	3/8"	200'	Clear

SKU	I.D.	Length	Color
150-0120	1/2"	200'	Clear
150-0580	5/8"	200'	Clear
150-0340	3/4"	200'	Clear
150-1000	1"	100'	Clear
150-1140	1-1/4"	100'	Clear
150-1120	1-1/2"	100'	Clear

## Series 163 MPI Air-Con



Specially formulated for chiller circulation and drain lines in air conditioning systems. Extra heavy-duty white PVC cover with black PVC inner tube reinforced with braided polyester yarn. Superior kink resistance. Temperature range is -40°F to 150°F (-40°C to 66°C).

### Specifications

SKU	I.D.	IN	MM	O.D.	MM	Weight lbs/ft (kg/m)
163-0580	5/8"	.625	15.9	.895"	15.9	0.20 (0.30)

### Series 163

SKU	I.D.	Length	Color
163-0580	5/8"	250'	White

## Series 162

### Clear Reinforced PVC Tubing (Red & Blue Tracer)



Clear Reinforced PVC Tubing (Red & Blue Tracer) Excellent for use in potable water, as well as hot and cold pressurized water applications. Heavy-duty clear vinyl, non-toxic reinforced tubing produced with an odorless and tasteless FDA approved compound. Not recommended for use with alcohol, petrochemical, or solvents. Operating temperature range -20°F to 150°F. (-29°F to 66°F).

#### Specifications


SKU	I.D.	IN	MM	O.D.	MM	Weightlbs/ft (kg/m)
162-0120	1/2"	.500	12.7	.720"	18.3	0.14 (0.21)
162-0580	5/8"	.625	15.9	.845"	21.5	0.16 (0.24)
162-0340	3/4"	.750	19.1	1.025"	26.0	0.21 (0.31)

#### Series 162

SKU	I.D.	Length	Color
162-0120	1/2"	250'	Clear
162-0580	5/8"	250'	Clear
162-0340	3/4"	250'	Clear

## Series 164

### Clear Reinforced Tubing (Blue Tracer)

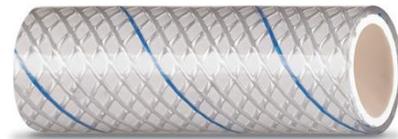

Excellent for use in potable water, as well as hot and cold pressurized water applications. Heavy-duty white vinyl, non-toxic reinforced tubing produced with an odorless and tasteless FDA approved compound. Not recommended for use with alcohol, anti-freeze, petrochemical, acid, or solvents. Temperature range is -40°F to 150°F (-40°C to -66°C).


## Specifications

SKU	I.D.	IN	MM	O.D.	MM	Weightlbs/ft (kg/m)
164-0120	1/2"	.500	12.7	.720"	18.3	0.14 (0.21)
164-0580	5/8"	.625	15.9	.845"	21.5	0.16 (0.24)
164-0340	3/4"	.750	19.1	1.025"	26.0	0.21 (0.31)

## Series 164

SKU	I.D.	Length	Color
164-0120	1/2"	250'	Clear
164-0580	5/8"	250'	Clear
164-0340	3/4"	250'	Clear

## Series 165 Heavy-Duty Clear Reinforced Tubing

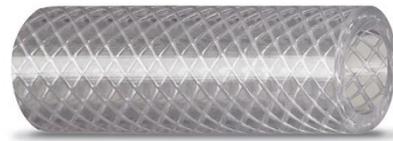

Excellent for use in potable water, as well as hot and cold pressurized water applications. Heavy-duty clear vinyl, non-toxic reinforced tubing produced with an odorless and tasteless FDA approved compound. Not recommended for use with alcohol, anti-freeze, petrochemical, acid, or solvents. Temperature range is -40°F to 150°F (-40°C to 66°C).

## Specifications

SKU	I.D.	IN	MM	O.D.	MM	Weightlbs/ft (kg/m)
165-0140	1/4"	.250	6.4	.500"	12.7	0.06 (0.09)
165-0380	3/8"	.375	9.5	.625"	15.9	0.09 (0.13)
165-0120	1/2"	.500	12.7	.813"	20.7	0.14 (0.21)
165-0580	5/8"	.625	15.9	1.000"	25.4	0.16 (0.24)

SKU	I.D.	IN	MM	O.D.	MM	Weightlbs/ft (kg/m)
165-0340	3/4"	.750	19.1	1.125"	28.6	0.21 (0.31)
165-1000	1"	1.000	25.4	1.375"	34.9	0.31 (0.46)
165-1120	1-1/2"	1.500	38.1	2.000"	50.8	0.65 (0.97)

### Series 165

SKU	I.D.	Length	Color
165-0140	1/4"	300'	Clear
165-0380	3/8"	300'	Clear
165-0120	1/2"	300'	Clear
165-0580	5/8"	200'	Clear
165-0340	3/4"	200'	Clear
165-1000	1"	100'	Clear
165-1120	1-1/2"	100'	Clear